




High Density Cooling MAX-AIR™

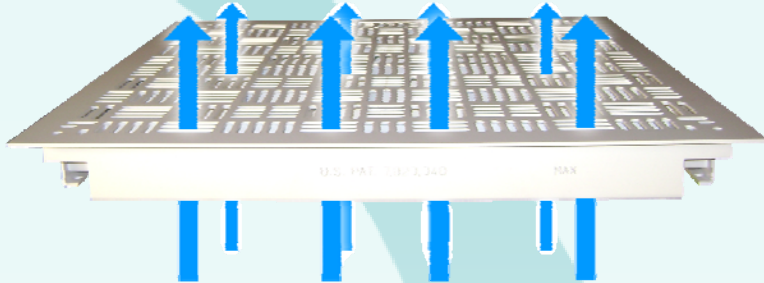

New Quick Corner™ Leveler
Adapts Easily and Quickly
Delivers 7' Cold Air Plume
Lowers Server Inlet Temps

High Density Cooling Closer to the Rack 66% High Volume Air Flow

MAX-AIR delivers 15% more cool air volume than Infinity AIRSTREAM and weighs under 28 LBS making it one of the lightest, easiest panels to manage in the data center. MAX-AIR's enhanced slot design allows for greater air volume transfer and maximum cooling effectiveness closer to the rack. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and overall equipment reliability.



AIRFLOW CONTROL ACCESSORIES

Quad Damper Kit (control range 10 CFM– 1950 CFM)

FLEX-AIR Intake Hood (restore positive airflow to servers)

Infinity® Performance Characteristics **

U.S. Patents: No. 7,823,340 No. 8,099,912 No. D561,327

Steel Panel (epoxy finish)	Understructure (wood/steel)	Panel Weight	Design Load	Safety Factor	Ultimate Load	Rolling Load	CFM (.10" H ₂ O)	Open Area*
MAX-AIR™	ANY	6.75 lbs /ft ²	1250 lbs	>3	4000 lbs	850 lbs	1300	66%
AIRSTREAM™	ANY	7.0 lbs /ft ²	1500 lbs	>3	5000 lbs	1000 lbs	1100	55%

* percentage of available open area

** Load performance tests are in accordance with CISCAs recommended test procedures

Infinity® Air Grate, by Opstock, Inc
www.infinityairgrate.com

For Sales and Information, contact:

Computer Floors, Inc

19 Richmond Street, Clifton, New Jersey 07011
(973) 340-3666 (888) 564-4998

www.computerfloors.us